

EXHAUSTED OIL ASPIRATORS



The air-operated oil aspirators are ideal for a rapid changing of motor oil to every vehicle. After depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes.

The units can suction till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids



The air-operated oil aspirators are ideal for a rapid changing of motor oil to every vehicle. After depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes.

The units can suction till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids



	<p>AIR-OPERATED OIL ASPIRATORS</p>	<p>page 232</p>
	<p>AIR-OPERATED OIL ASPIRATORS AND DRAIN UNITS</p>	<p>page 234</p>
	<p>AIR-OPERATED OIL ASPIRATORS AND DRAIN UNITS WITH PANTOGRAPH</p>	<p>page 237</p>
	<p>WHEELED OIL ASPIRATORS WITH PUMP</p>	<p>page 241</p>
	<p>WALL-FIXING OIL ASPIRATORS WITH PUMP</p>	<p>page 242</p>
	<p>OIL ASPIRATORS WITH DIAPHRAGM PUMP</p>	<p>page 243</p>
	<p>KITS WITH AIR-OPERATED DIAPHRAGM PUMPS FOR SUCTION-TRANSFER OIL</p>	<p>page 244</p>
	<p>PROBES FOR OIL ASPIRATORS</p>	<p>page 246</p>



040-1418-000





Art. 040-1418-000

Air-operated exhausted oil aspirator 24 l


Tank capacity 24 l with level indicator

Manual air emptying of tank

Equipped with 10 standard probes (Art.044-1479-000)

040-1418-000 13,100 0,081 1



040-1420-000

Art. 040-1420-000

Air-operated exhausted oil aspirator 24 l

Tank capacity 24 l with level indicator


Manual air emptying of tank (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)






040-1420-000 14,200 0,074 1



040-1427-000

Art. 040-1427-000

Industrial air-operated aspirator for liquids 90 l

Tank capacity 90 l with level indicator

Abs tool holder basin with 3 sections

Pneumatic air emptying of tank (max pressure 0,5 bar)


Equipped with 2 probes Ø 12 and Ø 20mm

Suction capacity 25 l/min






040-1427-000 29,600 0,240 1



Technical data		040-1418-000	040-1420-000	040-1427-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	1' - 1,5'	1' - 1,5'	2,5' - 3'
Max suction capacity with a depressurisation	l	13 - 16	13 - 16	60 - 65
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil aspirators are ideal for a rapid changing of motor oil to every vehicle.

After depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes.

The units can suction till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80 °C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids

Art. 040-1424-000


Air-operated exhausted oil aspirator 65 l

Tank capacity 65 l with level indicator
 Abs tool holder basin with 3 sections
 Pneumatic air emptying of tank (max pressure 0,5 bar)
 Equipped with 10 standard probes (Art.044-1479-000)






040-1424-000 24,600 0,220 1






040-1424-000

Art. 040-1425-000

Air-operated exhausted oil aspirator 90 l

Tank capacity 90 l with level indicator
 Abs tool holder basin with 3 sections
 Pneumatic air emptying (max pressure 0,5 bar)
 Equipped with 10 standard probes (Art.044-1479-000)


040-1425-000 27,100 0,240 1



040-1425-000

Art. 040-1428-000


Air-operated exhausted oil aspirator 120 l

Tank capacity 120 l with level indicator
 Abs tool holder basin with 3 sections
 Pneumatic air emptying (max pressure 0,5 bar)
 Equipped with 10 standard probes (Art.044-1479-000)






040-1428-000 27,200 0,310 1



040-1428-000

Technical data		040-1424-000	040-1425-000	040-1428-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'	3' - 3,5'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil aspirators are ideal for a rapid changing of motor oil to every vehicle. After depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suction till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids



040-1430-000


Art. 040-1430-000

Air-operated oil suction-drainer for exhausted oil 65 l

- Tank capacity 65 l with level indicator
- Abs tool holder basin with 3 sections
- Recovery basin capacity 15 l with breakwater grate to drip the substituted oil filters
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)



040-1430-000 30,400 0,240 1



040-1432-000


Art. 040-1432-000

Air-operated oil suction-drainer for exhausted oil 90 l

- Tank capacity 90 l with level indicator
- Abs tool holder basin with 3 sections
- Recovery basin capacity 20 l with ergonomic and **360° swivelling** abs funnel with breakwater grate to drip the substituted oil filters
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)



040-1432-000 37,400 0,240 1



040-1433-000


Art. 040-1433-000

Air-operated oil suction-drainer for exhausted oil 120 l

- Tank capacity 120 l with level indicator
- Abs tool holder basin with 3 sections
- Recovery basin capacity 20 l with ergonomic and **360° swivelling** abs funnel with breakwater grate to drip the substituted oil filters
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art. 044-1479-000)



040-1433-000 38,700 0,310 1



Technical data		040-1430-000	040-1432-000	040-1433-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'	3' - 3,5'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil aspirators are ideal for a rapid changing of motor oil to every vehicle.

The recovery of the exhausted oil is carried out for fall, through the lateral basin adjustable for height, and also through aspiration thanks to the probes.

After depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes.

The units can suction till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids

AIR-OPERATED ASPIRATORS FOR EXHAUSTED OIL WITH PRE-CHAMBER



Art. 040-1434-000

Air-operated aspirator for exhausted oil 65 l with pre-chamber

- Tank capacity 65 l with level indicator
- Abs tool holder basin with 3 sections
- Pre-chamber capacity 10 l
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)



040-1434-000 29,400 0,240 2



040-1434-000


Art. 040-1435-000

Air-operated aspirator for exhausted oil 90 l with pre-chamber

- Tank capacity 90 l with level indicator
- Abs tool holder basin with 3 sections
- Pre-chamber capacity 10 l
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)



040-1435-000 32,200 0,290 2



040-1435-000


Art. 040-1438-000

Air-operated aspirator for exhausted oil 120 l with pre-chamber

- Tank capacity 120 l with level indicator
- Abs tool holder basin with 3 sections
- Pre-chamber capacity 10 l
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)



040-1438-000 32,300 0,310 2



040-1438-000

Technical data		040-1434-000	040-1435-000	040-1438-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'	3' - 3,5'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil aspirators are ideal for a rapid changing of motor oil to every vehicle. After depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suction till 2/3 of their capacity.

The pre-chamber permits the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning.

Change the oil at a temperature of 60° - 80 °C (when the engine is just switched off).

Warning: It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.



040-1442-000



040-1445-000



040-1448-000


Art. 040-1442-000

Air-operated suction-drainer for exhausted oil 65 l with pre-chamber

- Tank capacity 65 l with level indicator
- Abs tool holder basin with 3 sections
- Pre-chamber capacity 10 l
- Recovery basin capacity 15 l with breakwater grate to drip the substituted oil filters
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)



040-1442-000 35,200 0,290 2




Art. 040-1445-000

Air-operated suction-drainer for exhausted oil 90 l with pre-chamber

- Tank capacity 90 l with level indicator
- Abs tool holder basin with 3 sections
- Pre-chamber capacity 10 l
- Recovery basin capacity 20 l with ergonomic and 360° swivelling abs funnel
- with breakwater grate to drip the substituted oil filters
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)



040-1445-000 42,300 0,290 2




Art. 040-1448-000

Air-operated suction-drainer for exhausted oil 120 l with pre-chamber

- Tank capacity 120 l with level indicator
- Abs tool holder basin with 3 sections
- Pre-chamber capacity 10 l
- Recovery basin capacity 20 l with ergonomic and 360° swivelling abs funnel
- with breakwater grate to drip the substituted oil filters
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)



040-1448-000 43,800 0,360 2



Technical data		040-1442-000	040-1445-000	040-1448-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'	3' - 3,5'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil aspirators are ideal for a rapid changing of motor oil to every vehicle. The recovery of the exhausted oil is carried out for fall, through the lateral basin adjustable for height, and also through aspiration thanks to the probes. After depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suction till 2/3 of their capacity.

The pre-chamber permits the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning.

Change the oil at a temperature of 60° - 80 °C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids


AIR OPERATED ASPIRATORS-SUCTION DRAINERS FOR EXHAUSTED OIL WITH PANTOGRAPH FOR CARS AND MOTORCYCLES



Art. 041-1449-000

Exhausted oil drain units with pantograph 65 l
For MOTORCYCLES

Tank capacity 65 l with level indicator
Abs tool holder basin with 3 sections
Recovery basin capacity 14 l on arms pantograph with breakwater grate to drip the substituted oil filters
Pneumatic air emptying (max pressure 0,5 bar)
Is not equipped with aspiration group and probes

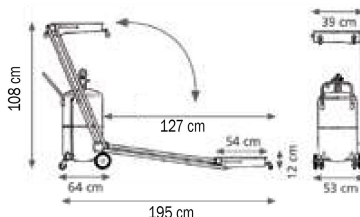


041-1449-000

Art. 041-1451-000

Exhausted oil aspirators-suction drainer with pantograph 65 l
For CARS AND MOTORCYCLES

Tank capacity 65 l with level indicator
Abs tool holder basin with 3 sections
Recovery basin capacity 14 l on arms pantograph with breakwater grate to drip the substituted oil filters
Pneumatic air emptying (max pressure 0,5 bar)
Equipped with 10 standard probes (Art.044-1479-000)

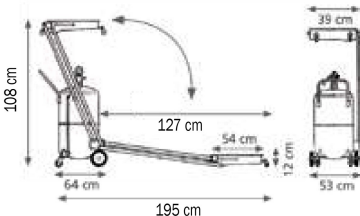

041-1451-000

Technical data	041-1449-000	041-1451-000
Air pressure for depressurisation	bar	- 7,5 - 8
Depressurisation time	l/min	- 2' - 2,5'
Max suction capacity with a depressurisation	l	- 43 - 45
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	- 1,5 - 2
Suction hose-emptying - hose length	m	2 2



The air-operated aspirators-suction drainers are used for the recovery of the exhausted oil by fall with tank (14 l), that can be put on the floor or lifted on lifts for vehicles.

After depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes.

The units can suction till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids



041-1450-000

Art. 041-1450-000

Air-operated oil suction-drainer with pantograph 65 l

Tank capacity 65 l with level indicator

Abs tool holder basin with 3 sections


Recovery basin capacity 14 l on arms pantograph

with breakwater grate to drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)

			
041-1450-000	42,600	0,450	1

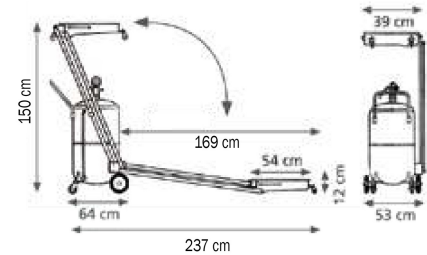

041-1452-000

Art. 041-1452-000

Air-operated oil suction-drainer with pantograph 90 l

Tank capacity 90 l with level indicator

Abs tool holder basin with 3 sections


Recovery basin capacity 14 l on arms pantograph

with breakwater grate to drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)

			
041-1452-000	44,400	0,450	1

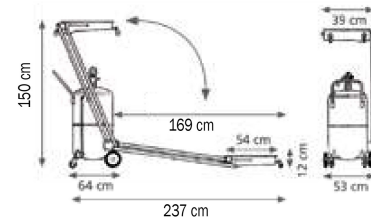

Technical data		041-1450-000	041-1452-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2

The air-operated aspirators-suction drainers are used for the recovery of the exhausted oil by fall with tank (14 l), that can be put on the floor or lifted on lifts for vehicles. This operation can be done also through aspiration, after depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suction till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids

AIR-OPERATED OIL SUCTION-DRAINERS FOR EXHAUSTED OIL WITH PANTOGRAPH AND PRE-CHAMBER



Art. 041-1454-000


Air-operated exhausted oil suction-drainer with pantograph 65 l and pre-chamber

- Tank capacity 65 l with level indicator
- Abs tool holder basin with 3 sections
- Pre-chamber capacity 10 l
- Recovery basin capacity 14 l on arms pantograph with breakwater grate to drip the substituted oil filters
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)






041-1454-000 46,100 0,450 1

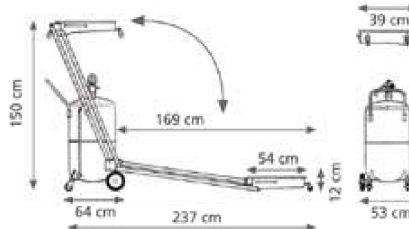

041-1454-000

Art. 041-1455-000


Air-operated exhausted oil suction-drainer with pantograph 90 l and pre-chamber

- Tank capacity 90 l with level indicator
- Abs tool holder basin with 3 sections
- Pre-chamber capacity 10 l
- Recovery basin capacity 14 l on arms pantograph with breakwater grate to drip the substituted oil filters
- Pneumatic air emptying (max pressure 0,5 bar)
- Equipped with 10 standard probes (Art.044-1479-000)






041-1455-000 48,500 0,450 1

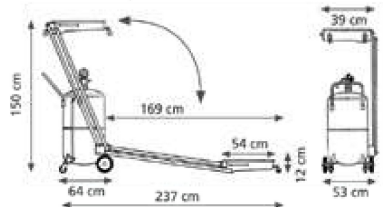

041-1455-000

Technical data		041-1454-000	041-1455-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2

The air-operated aspirators-suction drainers are used for the recovery of the exhausted oil by fall with tank (14 l), that can be put on the floor or lifted on lifts for vehicles. This operation can be done also through aspiration, after depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes.

The units can suction till 2/3 of their capacity.

The pre-chamber permits the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids



041-1453-000

Art. 041-1453-000

Air-operated exhausted oil suction-drainer with pantograph 120 l

Tank capacity 120 l with level indicator

Abs tool holder basin with 3 sections

Recovery basin capacity 14 l on arms pantograph


with breakwater grate to drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



041-1453-000 45,900 0,520 1

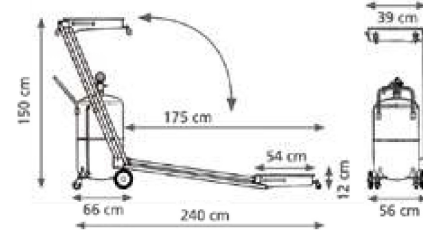

041-1456-000

Art. 041-1456-000

Air-operated exhausted oil suction-drainer with pantograph 120 l

For TRUCKS

Tank capacity 120 l with level indicator

Abs tool holder basin with 3 sections

Recovery basin capacity 50 l on arms pantograph


with breakwater grate to drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



041-1456-000 55,000 0,650 1

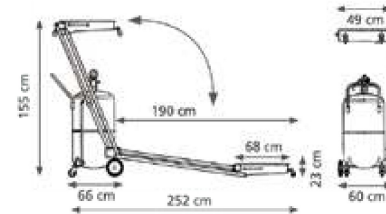

Technical data		041-1453-000	041-1456-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8
Depressurisation time	l/min	3' - 3,5'	3' - 3,5'
Max suction capacity with a depressurisation	l	85 - 90	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2

The air-operated aspirators-suction drainers are used for the recovery of the exhausted oil by fall with tank (14-50l), that can be put on the floor or lifted on lifts for vehicles. This operation can be done also through aspiration, after depressurization they work autonomously, without the need to be connected to compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suction till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

Warning: do not use these units for the suction of brake oils, fuels and inflammable liquids

WHEELED ASPIRATORS FOR EXHAUSTED OIL WITH PNEUMATIC PUMP



Art. 042-1410-000

Wheeled aspirator with pump for drums of 50-60 l

Composed by:

Art.020-1165-000 Air-operated pump **ratio=1:1**


Equipped with the flow rate adjuster and the vacuum gauge

Art.030-1395-000 4-wheels trolley

Art.044-1479-000 Set 10 standard probes

2 m aspiration – delivery hoses

Art.024-1232-F00 Oil dispensing nozzle with flexible end

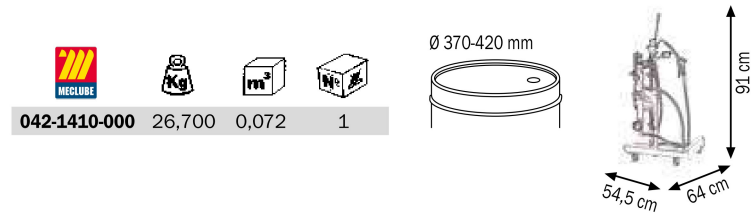

042-1410-000	26,700	0,072	1



042-1410-000

Art. 042-1411-000

Wheeled aspirator with pump for drums of 180-220 l

Composed by:

Art.020-1165-000 Air-operated pump **ratio=1:1**


Equipped with the flow rate adjuster and the vacuum gauge

Art.030-1400-000 4-wheels trolley

Art.044-1479-000 Set 10 standard probes

2 m aspiration – delivery hoses

Art.024-1232-F00 Oil dispensing nozzle with flexible end

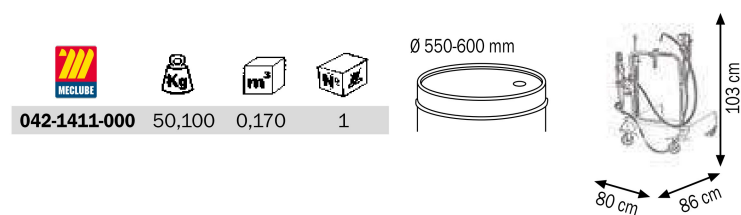

042-1411-000	50,100	0,170	1



042-1411-000

Art. 042-1412-000

Air-operated oil suction-drainer 90 l with pneumatic oil pump

Pneumatic air emptying (max pressure 0,5 bar)

Composed by:

Tank capacity 90 l with level indicator

Abs tool holder basin with 3 sections

Art.020-1165-000 Air-operated pump **ratio=1:1**

Equipped with the flow rate adjuster and the vacuum gauge


Recovery basin capacity 20 l

with ergonomic and **360° swivelling** abs funnel

with breakwater grate to drip the substituted oil filters

Art.044-1479-000 Set 10 standard probes

2 m aspiration – delivery hoses

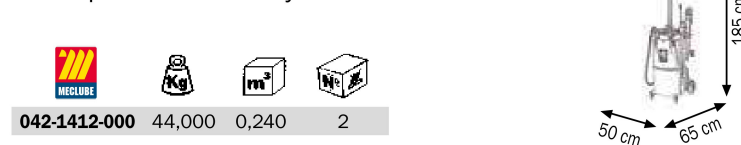

042-1412-000	44,000	0,240	2



042-1412-000

Suitable for the aspiration of exhausted oil and similar fluids from every motor vehicle. When you reverse the position of the two hoses the aspirator can deliver the aspirated fluids.

Warning: It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.



042-1304-000

Art. 042-1304-000

Wall-fixing aspirator for emptying exhausted oil aspirator/suction-drainer

Composed by:

Art.020-1168-000 Air-operated pump **ratio=1:1**

Equipped with the flow rate adjuster

Art.R34-0002-006 Y-shaped in-line F-F 1"

Art.F96-0100-606 Nipple 1"BSP-1"BSP

Art.025-1265-000 Wall-fixing bracket

Art.910-0600-020 Flex hose Ø 25mm 2m

Art.B27-1132-035 n 2 stainless steel screw clamps 32-35 mm


Art.R18-0855-255 Rubber connection M 1" Ø 25mm

Art.F96-0500-005 Quick disconnect coupling female 3/4"

Art.F96-0502-005 Quick disconnect coupling male 3/4"



042-1304-000 10,600 0,072 1



042-1413-000

Art. 042-1413-000

Wall-fixing aspirator for exhausted oil with pump

Composed by:

Art.020-1168-000 Air-operated pump **ratio=1:1**

Equipped with the flow rate adjuster and the vacuum gauge

Art.025-1265-000 Wall-fixing bracket

Art.042-5805-010 Wall plate with drip tray

Art.044-1479-A00 Probe holder fitting with lever valve

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes


Art.916-0411-040 spirac 4m aspiration Ø 12 M-M 1/4 - delivery hose

Art.906-0404-040 1SC 1/2" hose M-F 4 m with plastic support

Art.024-1232-F00 Oil dispensing nozzle with flexible end



042-1413-000 29,500 0,031 2



042-1414-000

Art. 042-1414-000

Wall-fixing aspirator for exhausted oil with pump

Composed by:

Art.020-1168-000 Air-operated pump **ratio=1:1**

Equipped with the flow rate adjuster and the vacuum gauge

Art.071-1206-410 Swiveling hose reel with 1SC 1/2" hose 10m length

Art.025-1265-000 Wall-fixing bracket

Art.042-5805-010 Wall plate with drip tray

Art.044-1479-A00 Probe holder fitting with lever valve

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes


Art.906-0424-015 1SC 1/2" hose F-F 1,5m length

Art.906-0404-040 1SC 1/2" hose M-F 4 m with plastic support

Art.024-1232-F00 Oil dispensing nozzle with flexible end



042-1414-000 47,300 0,083 3



ATTENTION: It is necessary to loosen the working of the pump through the flux adjuster to maintain the vacuum gauge in the optimal position of - 0,6.

Warning: It is not possible to suck brake oils, fuels, inflammable and corrosive liquids

AIR-OPERATED DIAPHRAGM PUMPS KITS FOR EXHAUSTED OIL



Art. 042-1417-000

Wall-fixing aspirators with air-operated diaphragm pump for emptying exhausted oil aspirator/suction-drainer

Composed by:

Art.028-A110-AB1 Aluminium diaphragm pump R= 1:1 110 l/min

Art.025-1266-001 Wall-fixing bracket

Art.R34-0002-005 Y-shaped brass in-line filter F-F 3/4"

Art.F96-0100-505 Nipple 3/4" BSP-3/4" BSP

Art.910-0600-020 Flex hose Ø 25 mm 2 m length

Art.B27-1132-035 n 2 stainless steel screw clamps 32-35 mm

Art.R18-0803-255 n 2 Rubber connection M 3/4" Ø 25mm

Art.F96-0500-005 Quick disconnect coupling female 3/4"


Art.F96-0502-005 Quick disconnect coupling male 3/4"



042-1417-000 12,700 0,072 1



042-1417-000



Art. 042-1415-000

Aspirators with wall-fixing air-operated diaphragm pump for exhausted oil

Composed by:

Art.028-A110-AB1 Aluminium diaphragm pump R= 1:1 110 l/min

Equipped with the flow rate adjuster and the vacuum gauge

Art.025-1266-001 Wall-fixing bracket

Art.042-5805-010 Wall plate with drip tray

Art.071-1206-410 Swiveling hose reel with 1SC 1/2" hose 10m length

Art.044-1479-A00 Probe holder fitting with lever valve

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes

Art.F96-0100-504 n2 Nipple 3/4" BSP-1/2" BSP

Art.906-0424-015 1SC 1/2" hose F-F 1,5m length

Art.906-0404-040 1SC 1/2" hose M-F 4 m length


Art.024-1232-F00 Oil dispensing nozzle with flexible end



042-1415-000 47,000 0,100 4



042-1415-000



Art. 042-1416-000

Aspirators support with air-operated diaphragm pump for exhausted oil

Composed by:

Art.023-1968-001 Service support

Art.028-A110-AB1 Aluminium diaphragm pump R= 1:1 110 l/min

Equipped with the flow rate adjuster and the vacuum gauge

Art.025-1266-001 Wall-fixing bracket

Art.071-1206-410 Swiveling hose reel with 1SC 1/2" hose 10m length

Art.044-1479-A00 Probe holder fitting with lever valve

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes

Art.F96-0100-504 n2 Nipple 3/4" BSP-1/2" BSP

Art.906-0424-015 1SC 1/2" hose F-F 1,5m length

Art.906-0404-040 1SC 1/2" hose M-F 4 m



042-1416-000 88,300 0,660 4



042-1416-000

Art. 042-1500-170

Wheeled kit with air-operated diaphragm pump for suction-transfer oil

Equipped with:


- Art.028-A170-AB1 Diaphragm pump of aluminium **R=1:1** 1" 170 l/min
- Art.030-1398-000 3-wheels trolley for drums of 180-220 l
- Art.F96-0800-006 4 ways evacuation valve F1"
- Art.F96-0100-604 Nipple 1" 1/2" BSP
- Art.F96-0100-606 Nipple 1" 1" BSP
- Art.R18-1250-006 n3 stainless steel connection 90° M-F 1"
- Art.R18-0803-256 n3 Rubber connection M 1" Ø 25mm
- Art.044-1479-A00 Probe holder fitting with lever valve
- Art.044-1485-000 Flexible probe Ø 8 l 800 mm
- Art.044-1502-000 Flexible probe Ø 12 l 800 mm
- Art.044-1504-000 Probe holder tube
- Art.025-1270-094 Suction kit flex hose 2 m + threaded
- Art.906-0404-030 1SC 1/2" hose M-F 3,0 m lenght
- Art.911-0500-011 Spiral suction hose 20x25 1,10 m lenght
- Art.B27-1120-032 n2 stainless steel hose clamp 20x32 mm



042-1500-170

			
042-1500-170	50,900	0,230	3

Ø 370-420 mm



Art. 042-1510-110

Wheeled kit with air-operated diaphragm pump for suction-transfer oil

Equipped with:


- Art.028-A110-AB1 Diaphragm pump of aluminium **R=1:1** 1" 110 l/min
- Art.030-1405-000 4-wheels trolley for drums of 180/220 l
- Art.042-0005-001 Bracket support pumps and hose reel 773x185 mm
- Art.070-1206-410 Hose reel with 1SC 1/2" hose 10,0 m lenght
- Art.F96-0800-006 4 ways evacuation valve F1"
- Art.F96-0100-604 Nipple 1" 1/2" BSP
- Art.F96-0100-605 Nipple 1" 3/4" BSP
- Art.R18-1250-006 n3 stainless steel connection 90° M-F 1"
- Art.R18-0803-256 n2 Rubber connection M 1" Ø 25mm
- Art.044-1479-A00 Probe holder fitting with lever valve
- Art.044-1485-000 Flexible probe Ø 8 l 800 mm
- Art.044-1498-000 Flexible probe Ø 12 l 800 mm
- Art.044-1504-000 Probe holder tube
- Art.025-1270-094 Suction kit flex hose 2 m + threaded
- Art.906-0424-010 1SC 1/2" hose F-F 1,0 m lenght
- Art.911-0500-011 Spiral suction hose 20x25 1,10 m lenght
- Art.B27-1120-032 n2 stainless steel hose clamp 20x32 mm



042-1510-110

			
042-1510-110	90,500	0,220	3

Ø 370-420 mm



Art. 042-1550-055


wall-fixing kit diaphragm pumps mod. A55 for transfer oil

Equipped with:

- Art.028-A055-AB1 Diaphragm pump of aluminium R=1:1 1/2" 55 l/min
- Art.025-1266-001 Wall-fixing bracket
- Art.R34-0002-004 Y-shaped brass in-line filter F 1/2"
- Art.F96-0100-404 N.2 nipple 1/2" 1/2"BSP
- Art.906-0404-015 1SC 1/2" hose M-F l 1,5 m
- Art.906-0424-020 1SC 1/2" hose F-F l 2,0 m
- Art.A28-1274-094 Ø 30 suction tube 940 mm lenght with threaded ring



042-1550-055 12,500 0,040 3



042-1550-055

Art. 042-1550-110


wall-fixing kit diaphragm pumps mod. A110 for transfer oil

Equipped with:

- Art.028-A110-AB1 Diaphragm pump of aluminium R=1:1 3/4" 110 l/min
- Art.025-1266-001 Wall-fixing bracket
- Art.R34-0002-005 Y-shaped brass in-line filter F 3/4"
- Art.F96-0100-505 N.2 nipple 3/4" 3/4"BSP
- Art.F96-0100-605 Reduced nipple 1"- 3/4"BSP
- Art.906-0505-030 1SC 3/4" hose M-F l 3,0 m
- Art.906-0525-020 1SC 3/4" hose F-F l 2,0 m
- Art.093-5200-000 Aluminium manual nozzle MC80



042-1550-110 17,800 0,063 3



042-1550-110

Art. 042-1550-170


wall-fixing kit diaphragm pumps mod. A170 for transfer oil

Equipped with:


- Art.028-A170-AB1 Diaphragm pump of aluminium R=1:1 1" 170 l/min
- Art.025-1266-002 Wall-fixing bracket
- Art.R34-0002-006 Y-shaped brass in-line filter F 1"
- Art.F96-0100-606 N.2 nipple 1"- 1"BSP
- Art.F96-0100-605 Reduced nipple 1"- 3/4" BSP
- Art.F96-0300-605 Plug reduction M1"- F 3/4" BSP
- Art.906-0505-030 1SC 3/4" hose M-F l 3,0 m
- Art.906-0626-020 1SC 1" hose F-F l 2,0 m
- Art.093-5200-000 Aluminium manual nozzle MC80



042-1550-170 29,800 0,082 3



042-1550-170

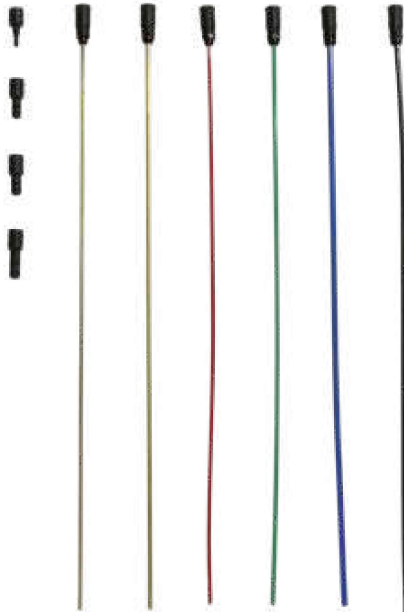

044-1479-000

Art. 044-1479-000

Set 10 standard probes supplied with the oil aspirators

Composed by:

- Art. 044-1480-000** Connection suitable for **Volkswagen – AUDI** engine-incorporated probes
 - Art. 044-1481-000** Connection suitable for **BMW** engine-incorporated probes
 - Art. 044-1481-B00** Connection suitable for **JTD – FIAT** engine-incorporated probes
 - Art. 044-1481-C00** Connection suitable for **Citroën-Peugeot** engine-incorporated probes
 - Art. 044-1482-000** Flexible probe Ø 5 mm 800 mm
 - Art. 044-1483-000** Flexible probe Ø 6 mm 800 mm
 - Art. 044-1484-000** Flexible probe Ø 7 mm 1000 mm
 - Art. 044-1485-000** Flexible probe Ø 8 mm 800 mm
 - Art. 044-1488-000** Metallic probe Ø 5 mm 800 mm
 - Art. 044-1489-000** Metallic probe Ø 6 mm 800 mm
- The same probes are available as **single items**

Probes on request

- Art. 044-1490-000** Flexible probe Ø 8 mm 1000 mm
- Art. 044-1491-000** Flexible probe Ø 5 mm 1200 mm
- Art. 044-1492-000** Flexible probe Ø 6 mm 1200 mm
- Art. 044-1493-000** Flexible probe Ø 7 mm 1200 mm
- Art. 044-1494-000** Flexible probe Ø 8 mm 1200 mm
- Art. 044-1497-000** Flexible probe Ø 8 mm 1500 mm
- Art. 044-1498-000** Flexible probe Ø 12 mm 800 mm
- Art. 044-1500-000** STAINLESS STEEL probe Ø 8 mm 800 mm
- Art. 044-1501-000** STAINLESS STEEL probe Ø 10 mm 800 mm
- Art. 044-1502-000** STAINLESS STEEL probe Ø 12 mm 800 mm
- Art. 044-1505-000** Wall-fixing support for probes
- Art. 044-1479-A00** Connection for probes with lever valve



044-1505-000



044-1479-A00